


Small Size 6 Digital Lightning Counter

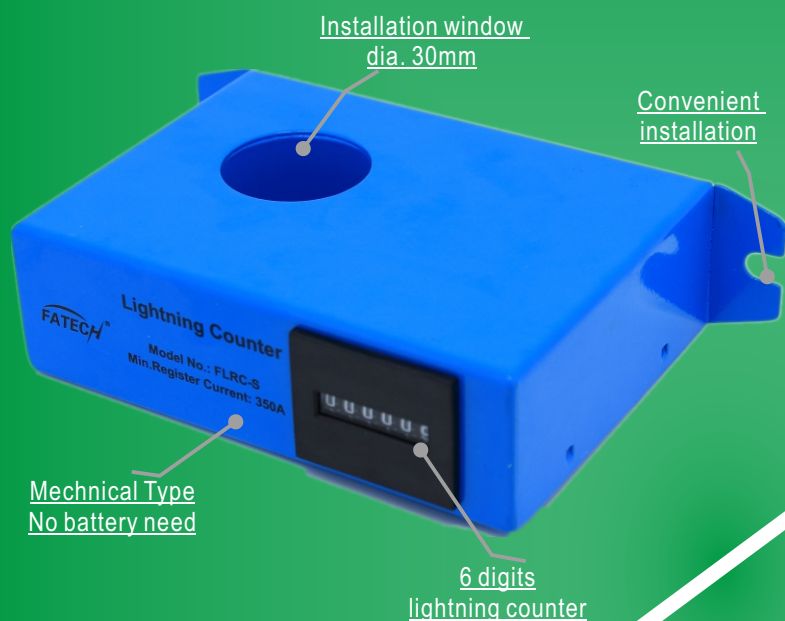

- ◆ Small size outdoor lightning counter.
- ◆ Long service life due to No battery need.
- ◆ Sensitive response and wide lightning current measuring range.
- ◆ Installation window dia. 30mm.
- ◆ Lightning counter can count the thunderstorm during the certain time of surge protection products installed, and to give suggestion for choose which surge protection products.

Surge Current Counter with LCD display, reset function

- ◆ The surge current counter is built with time clock function.
- ◆ Can register 0~255 of lightning strikes, the data won't be lost in case of power failure.
- ◆ Can check the real time (year/month/day/hour/minute/second) of each lightning strike.
- ◆ Number counting repetition up to 1 million times.



FATECH ELECTRONIC (FOSHAN) CO.,LTD


Add : Building D7, Guangdong New Light Production Base, Luocun, Shishan Town, Nanhai District, Foshan City, Guangdong Province, China.

Tel : (+86)757-86718031



Fax : (+86)757-83557685

web : www.fatech-surge-protection.com ; www.fatech-spd.cn


E-mail : sales@fatech-surge-protection.com ; sales@fatech-spd.cn



Small Size 6 Digital Lightning Counter

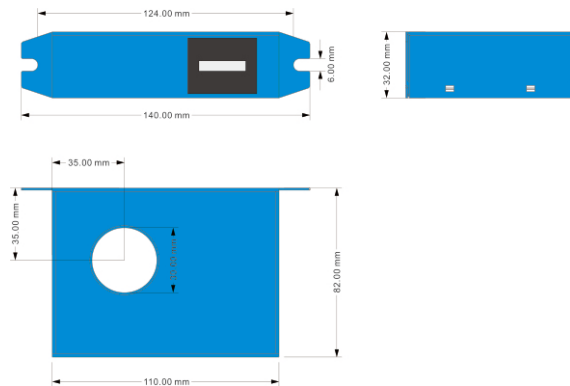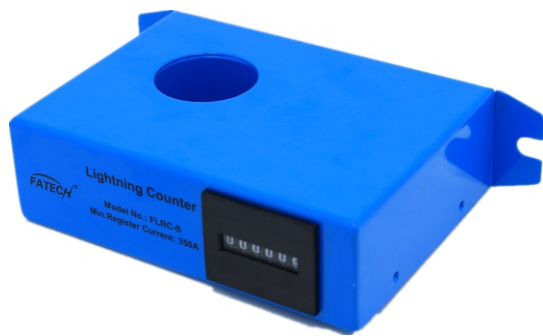

Model	FLRC-S/II
Counting Current (rise time $\geq 8\mu s$)	$> 350A$
Sequence of impulse	$> 1s$
Display Model	Electromechanical digital display
Indicator	Lightning Event 0~999999
Counting Current (rise time $\geq 8\mu s$)	Inductive Probe (Built-in)
Working mode	No battery need
Operation temperature ($^{\circ}C$)	$-20 \sim +70$
Dimension of installation window (mm)	30mm
Dimension of counter (mm)	110x33x82mm
Enclosure material	Metal Plate
Degree of protection	IP67

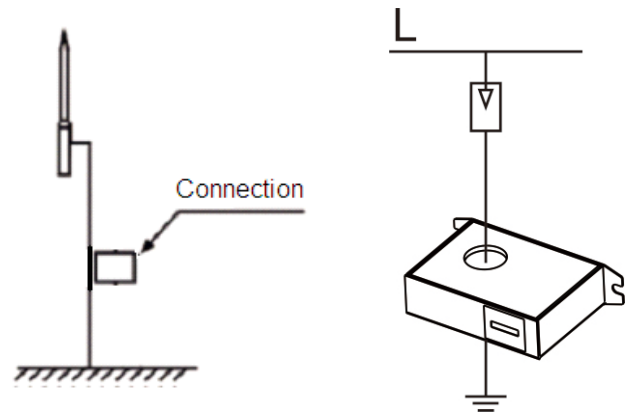

Model	FLRC-L/II
Nominal voltage (U_n)	220V AC
Indicator	0~255
Counting Current (rise time $\geq 8\mu s$)	50A(8/20 μs)
Counting max current	150kA(8/20 μs)
Date/time indication	Y/M/D/H/M/S
Communication	RS485
Installation	35mmDIN
Enclosure material	UL94 V-0
Degree of protection	IP20
Dimension (mm)	72*88*59 (L*W*H)

Surge Current Counter with LCD display, reset function

